

# 3/10 HP THERMOPLASTIC SUBMERSIBLE SUMP PUMP

# blueangel<sup>™</sup> PUMPS

The Professional's Line



• **35 GPM @ 5'**

• **Reliable, Reinforced Thermoplastic Motor Housing and Volute**

• **Stainless Steel Fasteners**

• **Oil-Filled, Thermally Protected Motor Prevents Overheating**

• **Reliable, Reinforced Thermoplastic Impeller**

• **Top Suction Screen Filters Debris**

• **High Capacity 1-1/2" NPT Discharge**

• **Will Replace Most Submersible Sumps Without Any Plumbing Changes**

• **Great For New Construction!**

Up To  
**2** YEAR  
Warranty  
BWSCAP30 Shown

LASTS 5 TIMES LONGER  
THAN STANDARD SWITCHES

[www.blueangelpumps.com](http://www.blueangelpumps.com)

# 3/10 HP THERMOPLASTIC SUBMERSIBLE SUMP PUMP



## BWSF30

- Vertical Float Switch
- 8', SJTW Power Cord
- 11" or Wider Sump Basins
- ON Level at 7" / OFF Level at 3"
- Shipping Weight, 9 lbs
- 1 Year Warranty





## BWST30

- Piggy-Back Tether Float Switch
- 8', SJTW Power Cord
- 14" or Wider Sump Basins
- ON Level at 14" / OFF Level at 7"
- Shipping Weight, 9 lbs
- 1 Year Warranty



## BWSCAP30

- Piggy-Back Cap Switch
- Microprocessor Controlled - No Moving Parts to Wear Out No Adjustment Needed!
- 8', SJTW Power Cord
- 11" or Wider Sump Basins
- Shipping Weight, 9 lbs
- **2 Year Warranty**

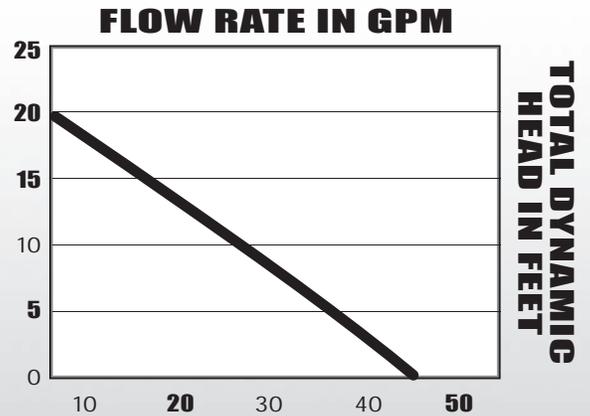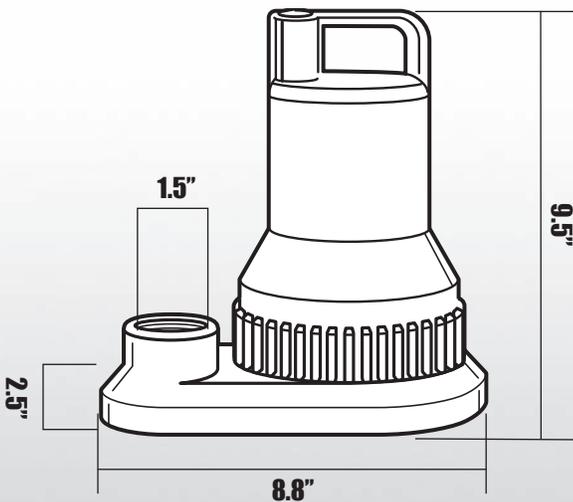

## MOTOR SPECIFICATIONS

| MOTOR       | RPM  | VOLTS | AMPS | Hz |
|-------------|------|-------|------|----|
| Shaded Pole | 3000 | 120   | 5.6  | 60 |

## PERFORMANCE

| DISCHARGE HEAD | 5' | 10' | 15' | 20' |
|----------------|----|-----|-----|-----|
| Gallons/Minute | 35 | 23  | 13  | 2   |

c UL<sup>us</sup> BWSF30, BWST30

c SB<sup>us</sup> BWSF30, BWST30 and BWSCAP30

FOR PUMP AND SYSTEM ACCESSORIES SEE ACCESSORIES SECTION

BLUE ANGEL™ PUMPS • 101 Production Drive • Harrison, OH 45030 • 1-888-636-6628

© 2008 Blue Angel Pumps All Rights Reserved